FRIGIDAIRE

PROFESSIONAL

Slide-In Range

FPGS3085K F

30" Gas

Powerful Performance

Auto Sht-Off
Effortless™ Convection Conversion
PowerPlus™ and Rapid Clean Options
Even Broil (11,500 BTU)

Performance-Driven Style

Pro-Select™ Controls
Real Stainless Steel
Continuous Cast Iron Grates with Black Matte Finish
Effortless™ Oven Rack
Even Baking Technology
Low-Simmer Burner

SpaceWise™ Design

Keep Warm Drawer with SpaceWise™ Half Rack
SpaceWise™ Half Rack

One-Touch Options

Keep Warm
My Favorite
Chicken Nuggets
Pizza
Add-a-Minute
One-Touch Self-Clean

More Easy-To-Use Features

Delay Start
Extra-Large Window with Pro-Tint Finish

A.D.A. Compliant*
Sabbath Mode (Star-K® Certified)

Capacities

4.2 Cu. Ft. Oven Capacity
1.4 Cu. Ft. Drawer Capacity

Overall Exterior Dimensions

Height	36-5/8"
Width	30"
Depth	28-5/16"

Available in:

Stainless (F)

Signature Features

PowerPlus™ Preheat
Preheat in less than six minutes.[1]

PowerPlus™ Boil
Boil water fast with our 17,000 BTU burner.

True Convection
Multi-rack baking is faster and more even with True Convection.

PowerPlus™ FullRange Burner
Go from a 600-BTU simmer to a 17,000-BTU boil quickly.

When properly installed, meets the appliance standards in the American with Disabilities Act and the Architectural Barriers Act Accessibility Guidelines as published by the United States Access Board on June 23, 2004.

[1] *Based on single rack cooking performance, not set temperature, using PowerPlus™ Preheat.*

FRIGIDAIRE
PROFESSIONAL

Slide-In Range

FPGS3085K F **30" Gas**

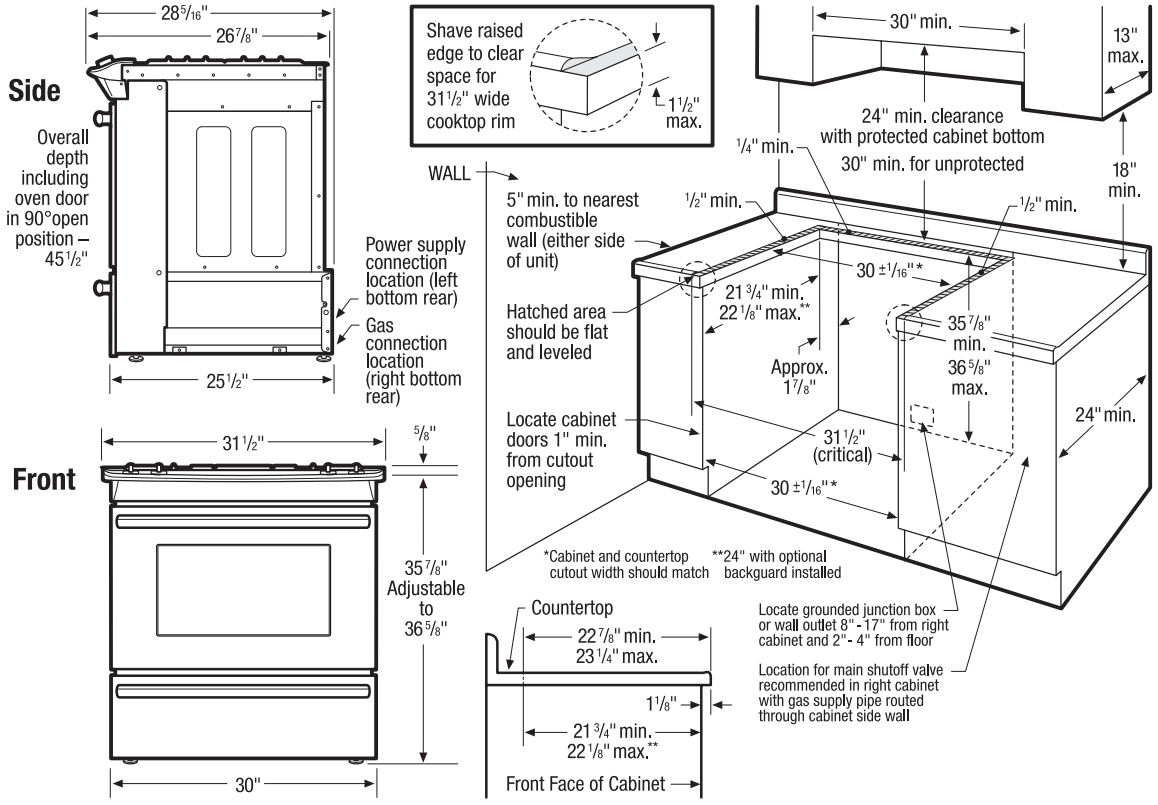

Slide-In Range Specifications

- Product Shipping Weight (approx.) – 250 Lbs.
- Voltage Rating – 120V/60 Hz/15 Amps
- Connected Load (kW Rating) @ 120 Volts = 1kW
  (For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.)
- Amps @ 120V = 10 Amps
- Always consult local and national electric and gas codes.
- Range ships with 3/4" factory regulator.
- LP Gas conversion kit supplied.
- Gas supply piping can be routed through side wall of right cabinet. Right side cabinet is ideal location for main shutoff valve.
- Countertop MUST be level in all directions and adjustable range height at least 1/16" greater than tallest cabinet height, to ensure metal rangetop flange will fit properly on countertop edge.
- When installing optional Backguard Kit, cutout depth of 21-3/4" minimum/22-1/8" maximum needs increased to 24".
- Overhead cabinetry should not exceed a 13" maximum depth.
- Absolute minimum horizontal distance between overhead cabinets installed to either side of appliance must be no less than maximum width of appliance.
- Allow 24" minimum clearance between rangetop and bottom of cabinet when bottom of wood or metal cabinet is protected by not less than 1/4" flame-retardant millboard covered with not less than No. 28 MGS sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper. Allow 30" minimum clearance when cabinet is unprotected.
- Allow 5" minimum clearance from edge of rangetop to nearest combustible wall on either side of unit.
- To reduce risk of fire when using overhead cabinetry, install range hood that projects horizontally a recommended minimum of 5" beyond bottom of cabinets.

Countertop Preparation

For detailed preparation instructions, refer to installation guide on the web.

- Flat square-finish (flat) countertop requires no preparation since rangetop flange lays directly on countertop edge.
- Formed front-edged countertops require front molded edge to be shaved flat 3/4" from each front corner of opening.
- Tile countertops may need cut back 3/4" from each front corner of opening and/or rounded edge flattened.
- For existing cutout width greater than 30-1/16" reduce the 3/4" overlap dimension or for cutout width of 29", replace actual side trim panels with smaller side trim panels, available with optional Side Trim Kit *(refer to detailed kit installation instructions)*.

Note: For planning purposes only. Refer to Product Installation Guide on the web at frigidaire.com for detailed instructions.

Optional Accessories

- Stainless Steel Rear Filler Kit – (PN# 901193-901S).
- Stainless Steel Side Panel Kit – (PN# 903074-901S).
- Stainless Steel Backguard Kit – (PN# 903046-901S).
- Stainless Steel Side Trim Kit – (PN# 903075-901S).

FRIGIDAIRE®

USA • 250 Bobby Jones Expressway • Martinez, GA 30907 • 1-800-FRIGIDAIRE • **frigidaire.com**
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • **frigidaire.ca**

Specifications subject to change.

FPGS3085K 05/09

© 2009 Electrolux Home Products, Inc.

Printed in the U.S.A.